

MC 0206 SERIES

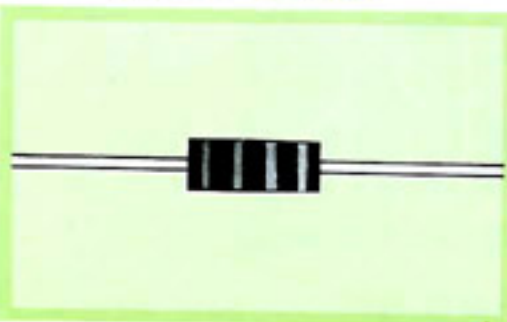


FIG: 1


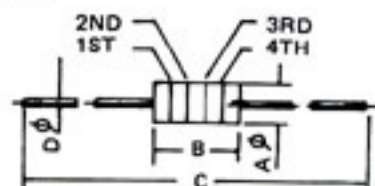


FIG: 2

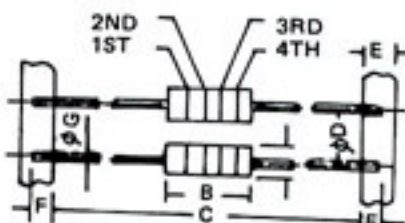

DIM.	SPEC. (m/m)	SPEC. (m/m)
A	2.42 ± 0.254	2.42 ± 0.254
B	6.35 ± 0.254	6.35 ± 0.254
C	62 ± 3	52.4 ± 1.5
D	0.5 ^φ	5 ± 0.5
E		6 ± 1
F		3.2 ^{-Q}
G		0.5 ^φ
FIG	1	2

4TH COLOR (TOLERANCE %)

- ± 5%: GOLD
- ± 10%: SILVER
- ± 20%: BLACK

TEST INSTRUMENTS :

- L : HP 4342A Q METER
- Q : HP 4342A Q METER
- SRF : DMC-230 DIGITAL DIP METER
DMC-470 DIGITAL DIP METER
- RDC : YEW 2755 WHEATSTONE BRIDGE
- IDC : HP 4261A DIGITAL LCR METER

ITEM	L	Q	TEST FREQ. (MHZ)	SRF (MHZ)	RDC (OHM)	IDC (mA)	COLOR CODE		
							1ST	2ND	3RD
- R10	0.10	35	25.2	690	0.07	1100	BRN	BLK	SIL
- R12	0.12	35	7.96	650	0.08	1100	BRN	RED	SIL
- R15	0.15	38		600	0.10	1100	BRN	GRN	SIL
- R18	0.18	33		550	0.12	1010	BRN	GRY	SIL
- R22	0.22	33		510	0.14	935	RED	RED	SIL
- R27	0.27	33		430	0.16	875	RED	VIO	SIL
- R33	0.33	30		410	0.20	780	ORN	ORN	SIL
- R39	0.39	30		380	0.30	640	ORN	WHT	SIL
- R47	0.47	30		340	0.35	590	YEL	VIO	SIL
- R56	0.56	30		300	0.50	490	GRN	BLU	SIL
- R68	0.68	28		275	0.60	450	BLU	GRY	SIL
- R82	0.82	28	250	0.85	380	GRY	RED	SIL	
- 1R0	1.0	25	230	1.00	350	BRN	BLK	GLD	
- 1R2	1.2	25	2.52	150	0.18	825	BRN	RED	GLD
- 1R5	1.5	28		140	0.22	745	BRN	GRN	GLD
- 1R8	1.8	30		125	0.30	640	BRN	GRY	GLD
- 2R2	2.2	30		115	0.40	550	RED	RED	GLD
- 2R7	2.7	37		100	0.50	495	RED	VIO	GLD
- 3R3	3.3	45		90	0.85	380	ORN	ORN	GLD
- 3R9	3.9	45		82	1.00	350	ORN	WHT	GLD
- 4R7	4.7	45		75	1.20	320	YEL	VIO	GLD
- 5R6	5.6	50		68	2.00	245	BLU	GRY	GLD
- 6R8	6.8	50		60	2.00	260	ORN	GRY	GLD
- 8R2	8.2	55	55	2.70	210	GRY	RED	GLD	
- 100	10	55	0.796	50	3.70	180	BRN	BLK	BLK
- 120	12	45		40	2.70	210	BRN	RED	BLK
- 150	15	45		35	2.80	205	BRN	GRN	BLK
- 180	18	50		32	3.10	195	BRN	GRY	BLK
- 220	22	50		25	3.30	190	RED	RED	BLK
- 270	27	50		22	3.50	185	RED	VIO	BLK
- 330	33	45		24	3.40	187	ORN	ORN	BLK
- 390	39	45		22	3.60	180	ORN	WHT	BLK
- 470	47	45		20	4.50	165	YEL	VIO	BLK
- 560	56	45		18	5.70	145	GRN	BLU	BLK
- 680	68	50	15	6.70	135	BLU	GRY	BLK	
- 820	82	45	14	7.30	130	GRY	RED	BLK	
- 101	100	45	13	8.00	125	BRN	BLK	BRN	
- 121	120	30	0.796	12	13.0	97	BRN	RED	BRN
- 151	150	30		11	15.0	85	BRN	GRN	BRN
- 181	180	30		10	17.0	79	BRN	GRY	BRN
- 221	220	30		9	21.0	73	RED	RED	BRN
- 271	270	30		8	25.0	65	RED	VIO	BRN
- 331	330	30		7	28.0	62	ORN	ORN	BRN
- 391	390	30		6.5	35.0	55	ORN	WHT	BRN
- 471	560	30		6.0	42.0	50	YEL	VIO	BRN
- 561	560	30		5.0	46.0	48	GRN	BLU	BRN
- 681	680	30		4.2	60.0	42	BLU	GRY	BRN
- 821	820	30	3.8	65.0	40	GRY	RED	BRN	
- 102	1000	30	3.4	72.0	38	BRN	BLK	RED	

Roßmann Electronic GmbH
Neuwiese 29 in D-86911 Dießen
Tel: 08807 / 50 60 Fax: 08807 / 60 27

info@rossmannweb.de

Idf.Nr.: Chilisinartikelnr.:	Lagerbestand:
1 MCO206ST-680K	497
2 MCO206ST-681H	2000
3 MCO206ST-151K	2000
4 MCO206ST-5R6K	1497
5 MCO206ST-8R2K	500
6 MCO206ST-180K	377
7 MCO206ST-3R3K	5898
8 MCO206ST-3R9K	2710
9 MCO206ST-5R6K	2000
10 MCO206ST-R82K	680
11 MCO206ST-5R6K	2000
12 MCO206ST-R68K	390

auf Rolle gegurtet