




Bi-Sonic

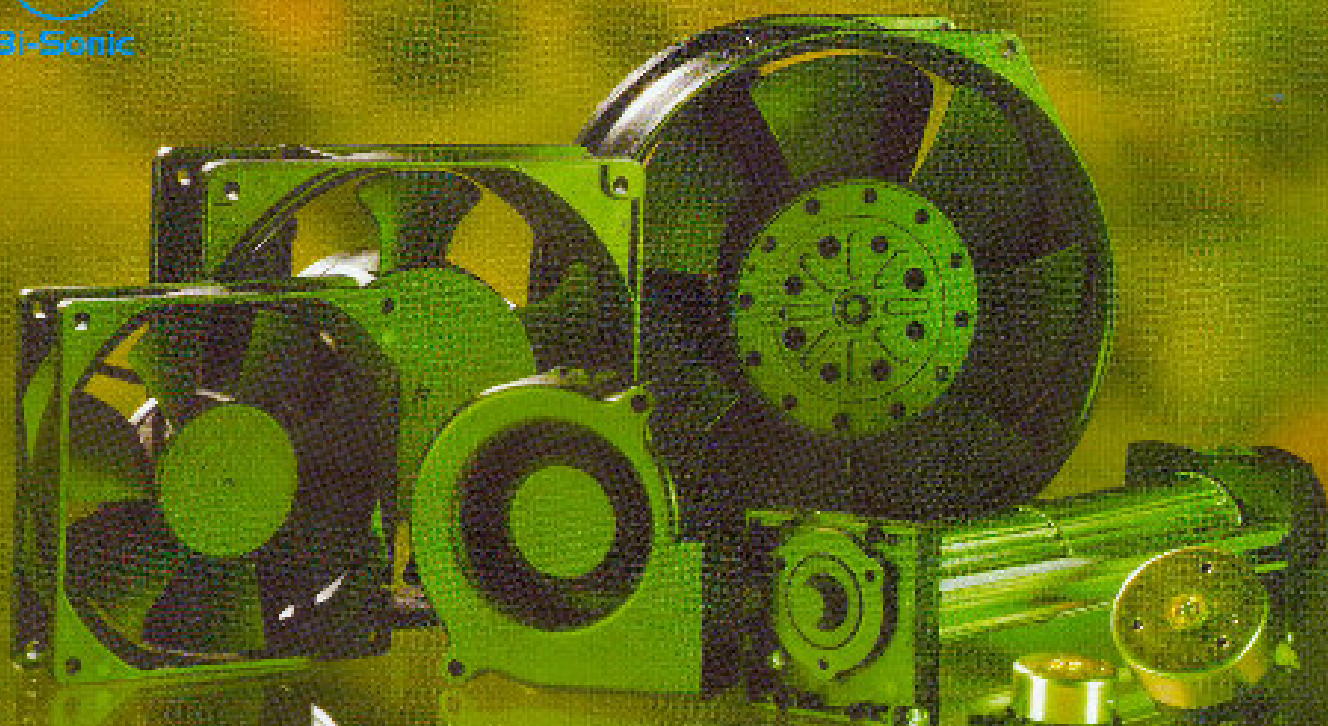

Bi-Sonic Technology Corp.

Sense of thermal cooling and air moving




IP54



AC Cooling Fan

Size(mm)	Model	♂	Volt.	WATTS	RPM	CFM	Inch R20	cBA
120x120x25	4C-1158-16	●	115	10 / 9	1300 / 1600	46.5 / 45	0.12 / 0.13	25 / 29
	4C-1158-16	○	115	10 / 9	1450 / 1600	46.5 / 45	0.12 / 0.13	25 / 29
	4C-1158-8	●	115	10 / 9	1800 / 1900	57 / 63	0.16 / 0.17	30 / 34
	4C-1158-8	○	115	10 / 9	1900 / 1900	57 / 63	0.16 / 0.17	30 / 34
	4C-2304-8	●	230	10 / 9	1800 / 1900	57 / 63	0.16 / 0.17	30 / 34
	4C-2304-8	○	230	10 / 9	1800 / 1900	57 / 63	0.16 / 0.17	30 / 34
	4C-1158-8	●	115	11 / 10	2100 / 2400	71 / 72	0.18 / 0.19	35 / 39
	4C-1158-8	○	115	11 / 10	2250 / 2400	71 / 72	0.18 / 0.19	35 / 39
	4C-2304-8	●	230	11 / 10	2300 / 2400	71 / 72	0.18 / 0.19	35 / 39
	4C-2304-8	○	230	11 / 10	2300 / 2400	71 / 72	0.18 / 0.19	35 / 39
	4C-1158-8	●	115	18 / 16	2650 / 3000	89 / 100	0.24 / 0.26	45 / 48
	4C-1158-8	○	115	18 / 16	2600 / 3000	89 / 100	0.24 / 0.26	45 / 48
	4C-2304-8	●	230	22 / 19	2600 / 3000	89 / 100	0.24 / 0.26	45 / 48
	4C-2304-8	○	230	22 / 19	2650 / 3000	89 / 100	0.24 / 0.26	45 / 48
	4C-DV8	●	230/115	33 / 19	2600 / 3050	89 / 100	0.26 / 0.29	45 / 48
	4C-DV8	○	230/115	23 / 19	2600 / 3050	89 / 100	0.26 / 0.29	45 / 48
120x80x45	4C-1158	●	115	46 / 43	2400 / 3000	176 / 189	0.49 / 0.52	56 / 57
	4C-2308	●	230	45 / 42	2700 / 2900	176 / 183	0.49 / 0.52	56 / 57
80x80x33	3E-1158-20	●	115	10 / 9	1750 / 2000	18 / 21	0.08 / 0.09	21 / 26
	3E-1158-20	○	115	10 / 9	1750 / 2000	18 / 21	0.08 / 0.09	21 / 26
	3E-2308-20	●	230	13 / 11	1750 / 2000	18 / 21	0.08 / 0.09	21 / 26
	3E-2308-20	○	230	13 / 11	1750 / 2000	18 / 21	0.08 / 0.09	21 / 26
	3E-1158-26	●	115	10 / 9	2150 / 2400	27 / 29	0.09 / 0.13	27 / 31
	3E-1158-26	○	115	10 / 9	2150 / 2500	27 / 29	0.09 / 0.13	27 / 31
	3E-2308-26	●	230	13 / 12	2150 / 2500	27 / 29	0.09 / 0.13	27 / 31
	3E-2308-26	○	230	13 / 12	2150 / 2500	27 / 29	0.09 / 0.13	27 / 31
	3E-1158-26	●	115	11 / 10	2400 / 2800	32 / 39	0.15 / 0.18	30 / 37
	3E-1158-26	○	115	11 / 10	2400 / 2800	32 / 39	0.15 / 0.18	30 / 37
	3E-2308-26	●	230	13 / 12	2400 / 2800	32 / 39	0.15 / 0.18	30 / 37
	3E-2308-26	○	230	13 / 12	2400 / 2800	32 / 39	0.15 / 0.18	30 / 37
	3E-1158-26	●	115	11 / 10	2700 / 3100	36 / 32	0.17 / 0.18	31 / 34
	3E-1158-26	○	115	11 / 10	2700 / 3100	36 / 32	0.17 / 0.18	31 / 34
	3E-2308-26	●	230	13 / 12	2700 / 3100	36 / 32	0.17 / 0.18	31 / 34
	3E-2308-26	○	230	13 / 12	2700 / 3100	36 / 32	0.17 / 0.18	31 / 34
3E-DV8	●	230/115	13 / 13	2700 / 3000	36 / 32	0.17 / 0.18	31 / 34	
3E-DV8	○	230/115	13 / 13	2700 / 3000	36 / 32	0.17 / 0.18	31 / 34	
3E-2308-R	●	230	13 / 12	2700 / 3100	36 / 31	0.14 / 0.15	34 / 39	
3E-2308-R	○	230	13 / 12	2700 / 3100	36 / 31	0.14 / 0.15	34 / 39	
65x65x30	3.5E-115-8	●	115	16 / 14	2500 / 3000	47 / 55	0.21 / 0.27	28 / 43
	3.5E-115-8	○	115	15 / 14	2500 / 3000	47 / 55	0.21 / 0.27	28 / 43
	3.5E-230-8	●	230	15 / 14	2500 / 3000	47 / 55	0.21 / 0.27	28 / 43
	3.5E-230-8	○	230	15 / 14	2500 / 3000	47 / 55	0.21 / 0.27	28 / 43
	3.5E-230-8	●	230/115	15 / 14	2500 / 3000	47 / 55	0.21 / 0.27	28 / 43
	3.5E-230-8	○	230/115	15 / 14	2500 / 3000	47 / 55	0.21 / 0.27	28 / 43
115x115x20	4E-1158-21	●	115	22 / 20	2000 / 2200	39 / 42	0.13 / 0.11	29 / 41
	4E-1158-21	○	115	22 / 20	2000 / 2200	39 / 42	0.13 / 0.11	29 / 41
	4E-2308-21	●	230	20 / 19	2000 / 2200	39 / 42	0.13 / 0.11	29 / 41
	4E-2308-21	○	230	20 / 19	2000 / 2200	39 / 42	0.13 / 0.11	29 / 41
	4E-1158	●	115	26 / 22	2700 / 3000	106 / 120	0.29 / 0.37	46 / 50
	4E-1158	○	115	24 / 22	2700 / 3000	106 / 120	0.29 / 0.37	46 / 50
4E-2308	●	230	22 / 21	2700 / 3000	106 / 120	0.29 / 0.37	46 / 50	
4E-2308	○	230	22 / 21	2700 / 3000	106 / 120	0.29 / 0.37	46 / 50	
120x160x36	5E-2308	●	230	45 / 44	2700 / 3000	174 / 184	0.40 / 0.41	50 / 53
	5E-1158	●	115	43 / 46	2750 / 3100	200 / 240	0.48 / 0.64	50 / 53
	5E-2308	●	230	45 / 46	2750 / 3100	200 / 240	0.48 / 0.64	50 / 53
	5E-2308	○	230 / 115	45 / 47	2750 / 3100	200 / 240	0.48 / 0.64	50 / 53
	5E-1158	●	115	48 / 49	2850 / 3400	190 / 230	0.48 / 0.64	50 / 53
	5E-2308	●	230	45 / 48	2850 / 3400	190 / 230	0.48 / 0.64	50 / 53
5E-2308-R	●	230 / 110	45 / 48	2750 / 3100	200 / 240	0.48 / 0.64	50 / 53	
5E-2308-R	○	230 / 110	45 / 48	2750 / 3100	200 / 240	0.48 / 0.64	50 / 53	
80x80x25	8P-1158	●	115	14 / 13	1900 / 2400	14 / 18	0.06 / 0.10	22 / 26
	8P-1158	○	115	14 / 13	1900 / 2400	14 / 18	0.06 / 0.10	22 / 26
	8P-2308	●	230	16 / 16	1900 / 2400	14 / 18	0.06 / 0.10	22 / 26
	8P-2308	○	230	16 / 15	1900 / 2400	14 / 18	0.06 / 0.10	22 / 26
	8P-1158	●	115	16 / 14	2000 / 3000	21 / 24	0.09 / 0.13	31 / 35
	8P-1158	○	115	16 / 14	2000 / 3000	21 / 24	0.09 / 0.13	31 / 35
	8P-2308	●	230	18 / 16	2000 / 3000	21 / 24	0.09 / 0.13	31 / 35
	8P-2308	○	230	18 / 16	2000 / 3000	21 / 24	0.09 / 0.13	31 / 35
92x92x25	9P-1158	●	115	14 / 13	1800 / 2300	22.25 / 26.56	0.06 / 0.11	24 / 25
	9P-1158	○	115	14 / 13	1800 / 2300	22.25 / 26.56	0.06 / 0.11	24 / 25
	9P-2308	●	230	16 / 14	1800 / 2300	22.25 / 26.56	0.06 / 0.11	24 / 25
	9P-2308	○	230	16 / 14	1800 / 2300	22.25 / 26.56	0.06 / 0.11	24 / 25
	9P-1158-R	●	115	16 / 14	2400 / 2900	24.56 / 34.17	0.17 / 0.17	35 / 41
	9P-1158-R	○	115	16 / 14	2400 / 2900	24.56 / 34.17	0.17 / 0.17	35 / 41
	9P-2308-R	●	230	16 / 14	2400 / 2900	24.56 / 34.17	0.17 / 0.17	35 / 41
	9P-2308-R	○	230	16 / 14	2400 / 2900	24.56 / 34.17	0.17 / 0.17	35 / 41
120x120x25	12P-1158	●	115	14 / 13	1600 / 2000	43.40 / 53.50	0.06 / 0.10	30 / 35
	12P-1158	○	115	14 / 13	1600 / 2000	43.40 / 53.50	0.06 / 0.10	30 / 35
	12P-2308	●	230	18 / 16	1600 / 2000	43.40 / 53.50	0.06 / 0.10	30 / 35
	12P-2308	○	230	18 / 16	1600 / 2000	43.40 / 53.50	0.06 / 0.10	30 / 35
	12P-1158-R	●	115	16 / 14	2000 / 2400	54.72 / 65.57	0.10 / 0.09	39 / 42
	12P-1158-R	○	115	16 / 14	2000 / 2400	54.72 / 65.57	0.10 / 0.09	39 / 42
	12P-2308-R	●	230	18 / 16	2000 / 2400	54.72 / 65.57	0.10 / 0.09	39 / 42
	12P-2308-R	○	230	18 / 16	2000 / 2400	54.72 / 65.57	0.10 / 0.09	39 / 42





DC Cross-Flow Fan

Size(mm)	Model	B	Volt.	WATTS	RPM	CFM	Inch H2O	dBA
98x108x134	JED-03009R	●	12	1.92	3600	13	0.055	165
161x169x195	JED-03015	●	12	2.88	3600	30	0.039	215
148x158x203	JED-03150R	●	12	6.60	4300	44	0.217	235



DC Blower

Size(mm)	Model	B	Volt.	WATTS	RPM	CFM	Inch H2O	dBA
80x80x30	SP803012H	○	12	2.40	2600	8.94	0.249	35
80x80x30	BP803012H	●	12	2.40	2600	8.94	0.249	35

DC Cooling Fan

Size(mm)	Model	B	Volt.	WATTS	RPM	CFM	Inch H2O	dBA
25x25x7	BP250705H	●	5	0.40	12000	2.12	0.085	31
	BP250712H	●	12	0.96	16000	2.83	0.113	41
30x30x7	BP300705M	●	5	0.40	8500	2.35	0.059	22
	BP300705H	●	5	0.75	12000	3.23	0.083	32
40x40x7	BP400705M	●	5	0.60	5500	4.16	0.045	22
	BP400705H	●	5	0.75	6500	6.70	0.084	28
40x40x8	BP400712H	●	12	1.80	7500	6.91	0.087	29
	BS400805M	○	5	0.40	5000	5.40	0.062	27
40x40x10	BS400812M	○	12	0.60	5000	5.40	0.062	27
	BP401005M	●	5	0.9	5000	6.48	0.074	24.5
40x40x20	SP401005M	○	5	0.9	5000	6.48	0.074	24.5
	BS401005M	○	5	0.9	5000	6.48	0.074	24.5
	BP401012M	●	12	1.08	5000	6.48	0.074	24.5
	SP401012M	○	12	1.08	5000	6.48	0.074	24.5
	BS401012M	○	12	1.08	5000	6.48	0.074	24.5
	BP401005H	●	5	1.15	6500	7.70	0.094	29
	SP401005H	○	5	1.15	6500	7.70	0.094	29
	BS401005H	○	5	1.15	6500	7.70	0.094	29
	BP401012H	●	12	1.56	6500	7.70	0.094	29
	SP401012H	○	12	1.56	6500	7.70	0.094	29
	BS401012H	○	12	1.56	6500	7.70	0.094	29
	BP402012L	●	12	0.96	5000	6	0.11	22
	SP402012L	○	12	0.96	5000	6	0.11	22
	BS402012L	○	12	0.96	5000	6	0.11	22
	BP402024L	●	24	2.40	5000	6	0.11	22
	SP402024L	○	24	2.40	5000	6	0.11	22
BS402024L	○	24	2.40	5000	6	0.11	22	
50x50x10	BP402012M	●	12	1.20	6000	7.09	0.154	26.4
	SP402012M	○	12	1.20	6000	7.09	0.154	26.4
	BS402012M	○	12	1.20	6000	7.09	0.154	26.4
	BP402024M	●	24	3.12	6000	7.09	0.154	26.4
	SP402024M	○	24	3.12	6000	7.09	0.154	26.4
	BS402024M	○	24	3.12	6000	7.09	0.154	26.4
	BP402012H	●	12	1.92	7000	8.53	0.209	31
	SP402012H	○	12	1.92	7000	8.53	0.209	31
	BS402012H	○	12	1.92	7000	8.53	0.209	31
	BP402024H	●	24	4.32	7000	8.53	0.209	31
	SP402024H	○	24	4.32	7000	8.53	0.209	31
	BS402024H	○	24	4.32	7000	8.53	0.209	31
50x50x15	BP501012L	●	12	0.84	3500	7.49	0.047	20
	SP501012L	○	12	0.84	3500	7.49	0.047	20
	BS501012L	○	12	0.84	3500	7.49	0.047	20
	BP501012M	●	12	1.20	4000	8.79	0.057	29
	SP501012M	○	12	1.20	4000	8.79	0.057	29
	BS501012M	○	12	1.20	4000	8.79	0.057	29
	BP501012H	●	12	1.92	5500	12.21	0.099	32
	SP501012H	○	12	1.92	5500	12.21	0.099	32
	BS501012H	○	12	1.92	5500	12.21	0.099	32
60x60x10	BP501512M	●	12	1.80	5600	15.75	0.20	35.3
	SP501512M	○	12	1.80	5600	15.75	0.20	35.3
	BS501512M	○	12	1.80	5600	15.75	0.20	35.3
	BP501512H	●	12	2.28	6300	17.22	0.23	37.85
	SP501512H	○	12	2.28	6300	17.22	0.23	37.85
60x60x15	BS501512H	○	12	2.28	6300	17.22	0.23	37.85
	BP601012M	●	12	1.92	4200	20.70	0.112	35
	SP601012M	○	12	1.92	4200	20.70	0.112	35
	BS601012M	○	12	1.92	4200	20.70	0.112	35
BP601012H	●	12	2.52	4700	23.30	0.130	36.8	




DC Brushless Motor


Size(mm)	Model	B	Volt.	WATTS	RPM	
φ 38x23	JIB0412LL	●	12	1.32	4900	
	JIB0412LM	●	12	1.44	5700	
	JIB0412LH	●	12	1.68	6400	
	JIB0412RL	●	12	1.32	4900	
	JIB0412RM	●	12	1.44	5700	
	JIB0412RH	●	12	1.68	6400	
	JIB0424LL	●	12	2.64	4900	
	JIB0424LM	●	12	2.88	5700	
	JIB0424LH	●	12	3.12	6400	
	JIB0424RL	●	12	2.64	4900	
φ 38x23	JIB0424RM	●	12	2.88	5700	
	JIB0424RH	●	12	3.12	6400	
	RMB0112B	●	12	0.96	4000	
	φ 40.8x48	GMB-12	●	12	0.84	2600
		GMB-24	●	24	2.40	5800
	φ 40.8x48	GMB-48	●	48	5.28	15000
		MS-700	●	12	1.92	10500
	φ 38.0x23	MS-800	●	12	1.32	5000
	φ 24.5x20	MS-6700	●	5	0.25	5000
	φ 24.5x25	MS-7200	●	5	0.55	10500





Size(mm)	Model	B	Volt.	WATTS	RPM	CFM	Inch H2O	dBA
60x60x15	BP601512M	●	12	1.92	4000	20.22	0.106	28.7
	BS601512M	○	12	1.92	4000	20.22	0.106	28.7
	BP601512H	●	12	2.16	4500	22.40	0.130	32.3
	BS601512H	○	12	2.16	4500	22.40	0.130	32.3
60x60x20	BP602012L	●	12	1.08	3000	13.8	0.09	23.39
	SP602012L	○	12	1.08	3000	13.8	0.09	23.39
	BS602012L	○	12	1.08	3000	13.8	0.09	23.39
	BP602012M	●	12	1.44	3600	17.3	0.14	26.16
	SP602012M	○	12	1.44	3600	17.3	0.14	26.16
	BS602012M	○	12	1.44	3600	17.3	0.14	26.16
	BP602012H	●	12	1.80	4200	20.3	0.18	30.43
	SP602012H	○	12	1.80	4200	20.3	0.18	30.43
	BS602012H	○	12	1.80	4200	20.3	0.18	30.43
	BP602012HH	●	12	2.16	4800	23.4	0.23	35.53
	SP602012HH	○	12	2.16	4800	23.4	0.23	35.53
	BS602012HH	○	12	2.16	4800	23.4	0.23	35.53
60x60x25	BP602512L-03	●	12	1.08	2600	12.8	0.074	23
	SP602512L-03	○	12	1.08	2600	12.8	0.074	23
	BS602512L-03	○	12	1.08	2600	12.8	0.074	23
	BP602524L-03	●	24	1.92	2600	12.8	0.074	23
	SP602524L-03	○	24	1.92	2600	12.8	0.074	23
	BS602524L-03	○	24	1.92	2600	12.8	0.074	23
	BP602512M-03	●	12	1.32	3200	16.7	0.122	25
	SP602512M-03	○	12	1.32	3200	16.7	0.122	25
	BS602512M-03	○	12	1.32	3200	16.7	0.122	25
	BP602524M-03	●	24	2.40	3200	16.7	0.122	25
	SP602524M-03	○	24	2.40	3200	16.7	0.122	25
	BS602524M-03	○	24	2.40	3200	16.7	0.122	25
	BP602512H-03	●	12	0.13	3800	19.5	0.162	29.6
	SP602512H-03	○	12	0.13	3800	19.5	0.162	29.6
	BS602512H-03	○	12	0.13	3800	19.5	0.162	29.6
	BP602524H-03	●	24	2.88	3800	19.5	0.162	29.6
	SP602524H-03	○	24	2.88	3800	19.5	0.162	29.6
	BS602524H-03	○	24	2.88	3800	19.5	0.162	29.6
	BP602512HL-03	●	12	2.76	5000	27.4	0.29	37.8
	SP602512HL-03	○	12	2.76	5000	27.4	0.29	37.8
	BS602512HL-03	○	12	2.76	5000	27.4	0.29	37.8
	BP602524HL-03	●	24	3.12	5000	27.4	0.29	37.8
	SP602524HL-03	○	24	3.12	5000	27.4	0.29	37.8
	BS602524HL-03	○	24	3.12	5000	27.4	0.29	37.8
	BP602512HM-03	●	12	4.08	6000	33.2	0.40	42.4
	SP602512HM-03	○	12	4.08	6000	33.2	0.40	42.4
	BS602512HM-03	○	12	4.08	6000	33.2	0.40	42.4
	BP602524HM-03	●	24	4.32	6000	33.2	0.40	42.4
	SP602524HM-03	○	24	4.32	6000	33.2	0.40	42.4
	BS602524HM-03	○	24	4.32	6000	33.2	0.40	42.4
	BP602512HH-03	●	12	4.68	7000	38.4	0.527	46.7
	SP602512HH-03	○	12	4.68	7000	38.4	0.527	46.7
BS602512HH-03	○	12	4.68	7000	38.4	0.527	46.7	
BP602524HH-03	●	24	5.28	7000	38.4	0.527	46.7	
SP602524HH-03	○	24	5.28	7000	38.4	0.527	46.7	
BS602524HH-03	○	24	5.28	7000	38.4	0.527	46.7	
70x70x15	BP701512L-02	●	12	2.64	3500	31	0.15	34
	SP701512L-02	○	12	2.64	3500	31	0.15	34
	BS701512L-02	○	12	2.64	3500	31	0.15	34
	BP701512M-02	●	12	3.84	4000	34.8	0.19	38
	SP701512M-02	○	12	3.84	4000	34.8	0.19	38
	BS701512M-02	○	12	3.84	4000	34.8	0.19	38
	BP701512H-02	●	12	4.44	4500	39	0.24	42
	SP701512H-02	○	12	4.44	4500	39	0.24	42
	BS701512H-02	○	12	4.44	4500	39	0.24	42
	BP701524L-02	●	24	3.36	3500	31	0.15	34
	SP701524L-02	○	24	3.36	3500	31	0.15	34
	BS701524L-02	○	24	3.36	3500	31	0.15	34
	BP701524M-02	●	24	4.32	4000	34.8	0.19	38
	SP701524M-02	○	24	4.32	4000	34.8	0.19	38
	BS701524M-02	○	24	4.32	4000	34.8	0.19	38
	BP701524H-02	●	24	5.28	4500	39	0.24	42
	SP701524H-02	○	24	5.28	4500	39	0.24	42
	BS701524H-02	○	24	5.28	4500	39	0.24	42
	BP701512M-03	●	12	2.88	3800	31.18	0.14	34
	SP701512M-03	○	12	2.88	3800	31.18	0.14	34
	BS701512M-03	○	12	2.88	3800	31.18	0.14	34
	BP701512H-03	●	12	3.36	4200	34.28	0.17	38
	SP701512H-03	○	12	3.36	4200	34.28	0.17	38
	BS701512H-03	○	12	3.36	4200	34.28	0.17	38
	BP701512HH-03	●	12	4.08	4500	37.1	0.20	39.4
	SP701512HH-03	○	12	4.08	4500	37.1	0.20	39.4
	BS701512HH-03	○	12	4.08	4500	37.1	0.20	39.4
	70x70x20	BP702012L	●	12	1.80	2900	24.5	0.09
SP702012L		○	12	1.80	2900	24.5	0.09	26
BS702012L		○	12	1.80	2900	24.5	0.09	26
BP702012M		●	12	2.16	3600	30.3	0.14	32.2
SP702012M		○	12	2.16	3600	30.3	0.14	32.2
BS702012M		○	12	2.16	3600	30.3	0.14	32.2
BP702012H		●	12	3.60	4300	36.2	0.22	37.7
SP702012H		○	12	3.60	4300	36.2	0.22	37.7
BS702012H		○	12	3.60	4300	36.2	0.22	37.7

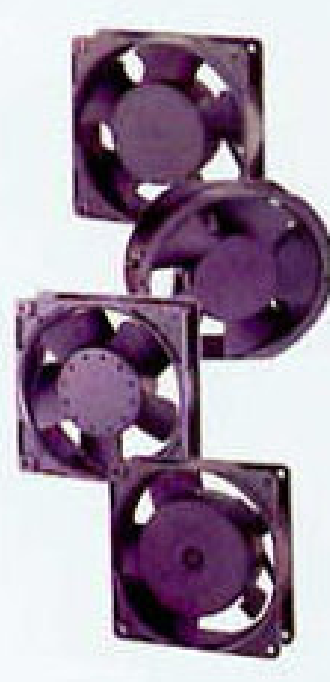

Size(mm)	Model	B	Volt.	WATTS	RPM	CFM	Inch H2O	dBA
70x70x25	BP702512M	●	12	3.96	5000	45.31	0.39	42.7
	SP702512M	○	12	3.96	5000	45.31	0.39	42.7
	BS702512M	◎	12	3.96	5000	45.31	0.39	42.7
	BP702512H	●	12	6.24	5500	49.36	0.45	45.39
	SP702512H	○	12	6.24	5500	49.36	0.45	45.39
	BS702512H	◎	12	6.24	5500	49.36	0.45	45.39
	BP702512HH	●	12	7.44	6000	54	0.55	47.5
	SP702512HH	○	12	7.44	6000	54	0.55	47.5
	BS702512HH	◎	12	7.44	6000	54	0.55	47.5
	80x80x15	BP801512M	●	12	2.04	2500	32	0.09
SP801512M		○	12	2.04	2500	32	0.09	31
BS801512M		◎	12	2.04	2500	32	0.09	31
BP801512H		●	12	2.64	3000	39	0.13	35
SP801512H		○	12	2.64	3000	39	0.13	35
BS801512H		◎	12	2.64	3000	39	0.13	35
BP801512HL		●	12	4.20	3500	45	0.17	40
SP801512HL		○	12	4.20	3500	45	0.17	40
BS801512HL		◎	12	4.20	3500	45	0.17	40
BP801512HM		●	12	5.40	4000	51	0.22	42
SP801512HM		○	12	5.40	4000	51	0.22	42
BS801512HM		◎	12	5.40	4000	51	0.22	42
BP801524M		●	24	2.88	2500	32	0.09	31
SP801524M		○	24	2.88	2500	32	0.09	31
BS801524M		◎	24	2.88	2500	32	0.09	31
BP801524H		●	24	3.36	3000	39	0.13	35
SP801524H		○	24	3.36	3000	39	0.13	35
BS801524H		◎	24	3.36	3000	39	0.13	35
BP801524HL		●	24	4.32	3500	45	0.17	40
SP801524HL		○	24	4.32	3500	45	0.17	40
BS801524HL		◎	24	4.32	3500	45	0.17	40
BP801524HM		●	24	5.76	4000	51	0.22	42
SP801524HM		○	24	5.76	4000	51	0.22	42
BS801524HM		◎	24	5.76	4000	51	0.22	42
80x80x20	BP802012L	●	12	1.32	2100	27.1	0.06	22.6
	SP802012L	○	12	1.32	2100	27.1	0.06	22.6
	BS802012L	◎	12	1.32	2100	27.1	0.06	22.6
	BP802012M	●	12	1.92	2700	34.8	0.09	29.5
	SP802012M	○	12	1.92	2700	34.8	0.09	29.5
	BS802012M	◎	12	1.92	2700	34.8	0.09	29.5
	BP802012H	●	12	3.00	3300	42.2	0.14	35.4
	SP802012H	○	12	3.00	3300	42.2	0.14	35.4
	BS802012H	◎	12	3.00	3300	42.2	0.14	35.4
	BP802012HL	●	12	4.20	3800	49.2	0.19	38.6
	SP802012HL	○	12	4.20	3800	49.2	0.19	38.6
	BS802012HL	◎	12	4.20	3800	49.2	0.19	38.6
80x80x25	BP802512L-03	●	12	1.80	2100	30	0.086	23.7
	SP802512L-03	○	12	1.80	2100	30	0.086	23.7
	BS802512L-03	◎	12	1.80	2100	30	0.086	23.7
	BP802512M-03	●	12	2.40	2700	37	0.127	29.8
	SP802512M-03	○	12	2.40	2700	37	0.127	29.8
	BS802512M-03	◎	12	2.40	2700	37	0.127	29.8
	BP802512H-03	●	12	3.60	3300	44	0.179	35.6
	SP802512H-03	○	12	3.60	3300	44	0.179	35.6
	BS802512H-03	◎	12	3.60	3300	44	0.179	35.6
	BP802512HL-03	●	12	4.80	4000	55.53	0.29	40.9
	SP802512HL-03	○	12	4.80	4000	55.53	0.29	40.9
	BS802512HL-03	◎	12	4.80	4000	55.53	0.29	40.9
	BP802524L-03	●	24	2.88	2100	30	0.086	23.7
	SP802524L-03	○	24	2.88	2100	30	0.086	23.7
	BS802524L-03	◎	24	2.88	2100	30	0.086	23.7
	BP802524M-03	●	24	4.80	2700	37	0.127	29.8
	SP802524M-03	○	24	4.80	2700	37	0.127	29.8
	BS802524M-03	◎	24	4.80	2700	37	0.127	29.8
	BP802524H-03	●	24	5.04	3300	44	0.179	35.6
	SP802524H-03	○	24	5.04	3300	44	0.179	35.6
BS802524H-03	◎	24	5.04	3300	44	0.179	35.6	
BP802524HL-03	●	24	6	4000	55.53	0.29	40.9	
SP802524HL-03	○	24	6	4000	55.53	0.29	40.9	
BS802524HL-03	◎	24	6	4000	55.53	0.29	40.9	
92x92x25	BP922512L	●	12	1.92	2000	41.50	0.091	28
	SP922512L	○	12	1.92	2000	41.50	0.091	28
	BP922524L	●	24	2.40	2000	41.50	0.091	28
	SP922524L	○	24	2.40	2000	41.50	0.091	28
	BP922512M	●	12	2.40	2500	50.50	0.138	34
	SP922512M	○	12	2.40	2500	50.50	0.138	34
	BP922524M	●	24	3.36	2500	50.50	0.138	34
	SP922524M	○	24	3.36	2500	50.50	0.138	34
	BP922512H	●	12	3.84	3000	58.70	0.169	38
	SP922512H	○	12	3.84	3000	58.70	0.169	38
	BP922524H	●	24	4.32	3000	58.70	0.169	38
	SP922524H	○	24	4.32	3000	58.70	0.169	38
	BP922524HL	●	24	5.76	4000	70.50	0.22	42
	SP922524HL	○	24	5.76	4000	70.50	0.22	42
	BS922524HL	◎	24	5.76	4000	70.50	0.22	42

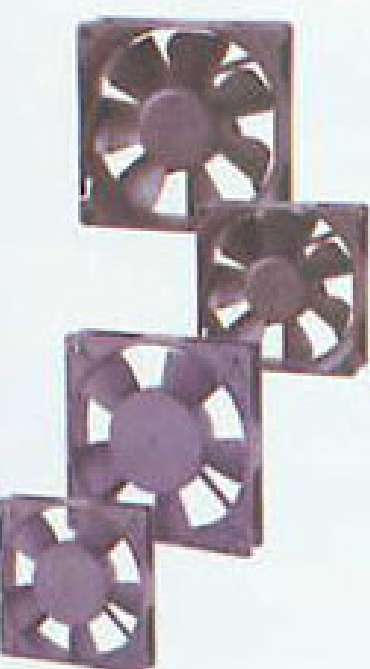

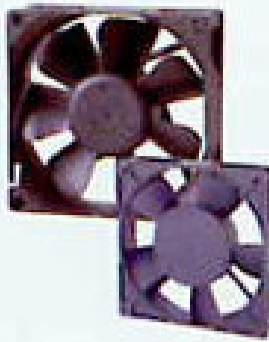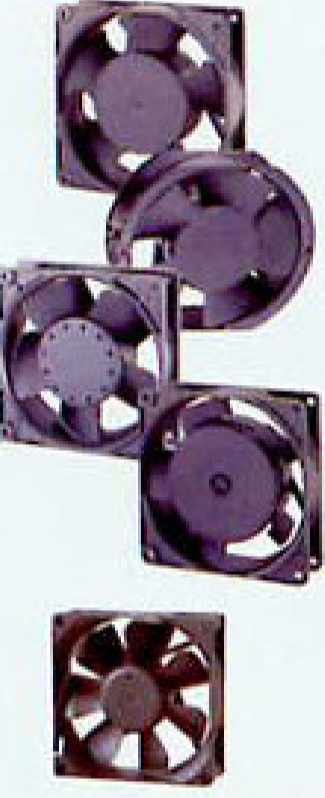Size(mm)	Model	B	Volt.	WATTS	RPM	CFM	Inch H2O	dBA
	BP1202512L	●	12	1.68	2000	61.40	0.114	38
	SP1202512L	○	12	1.68	2000	61.40	0.114	38
	BP1202524L	●	24	2.40	2000	61.40	0.114	38
	SP1202524L	○	24	2.40	2000	61.40	0.114	38
	BP1202512M	●	12	3.00	2500	74.50	0.150	43.84
	SP1202512M	○	12	3.00	2500	74.50	0.150	43.84
	BP1202524M	●	24	4.32	2500	74.50	0.150	43.84
	SP1202524M	○	24	4.32	2500	74.50	0.150	43.84
	BP1202512H	●	12	4.56	3000	88.30	0.189	48.32
	SP1202512H	○	12	4.56	3000	88.30	0.189	48.32
	BP1202524H	●	24	5.76	3000	88.30	0.189	48.32
	SP1202524H	○	24	5.76	3000	88.30	0.189	48.32
	BP1203812M	●	12	2.64	2500	66.83	0.153	40
	SP1203812M	○	12	2.64	2500	66.83	0.153	40
	BP1203824M	●	24	3.36	2500	66.83	0.153	40
	SP1203824M	○	24	3.36	2500	66.83	0.153	40
	BP1203848M	●	48	5.76	2500	66.83	0.153	40
	SP1203848M	○	48	5.76	2500	66.83	0.153	40
	BP1203812H	●	12	3.84	3000	85	0.23	48
	SP1203812H	○	12	3.84	3000	85	0.23	48
	BP1203824H	●	24	4.32	3000	85	0.23	48
	SP1203824H	○	24	4.32	3000	85	0.23	48
	BP1203848H	●	48	6.24	3000	85	0.23	48
	SP1203848H	○	48	6.24	3000	85	0.23	48
	BP1203812M-03	●	12	12	2400	121	0.22	46
	SP1203812M-03	○	12	12	2400	121	0.22	46
	BP1203824M-03	●	24	14.4	2400	121	0.22	46
	SP1203824M-03	○	24	14.4	2400	121	0.22	46
	BP1203848M-03	●	48	8.64	2400	121	0.22	46
	SP1203848M-03	○	48	8.64	2400	121	0.22	46
	BP1203812H-03	●	12	13.2	2900	145	0.29	48
	SP1203812H-03	○	12	13.2	2900	145	0.29	48
	BP1203824H-03	●	24	19.2	2900	145	0.29	48
	SP1203824H-03	○	24	19.2	2900	145	0.29	48
	BP1203848H-03	●	48	19.2	2900	145	0.29	48
	SP1203848H-03	○	48	19.2	2900	145	0.29	48
	BP1203812HH-03	●	12	21.6	3400	168	0.43	50
	SP1203812HH-03	○	12	21.6	3400	168	0.43	50
	BP1203824HH-03	●	24	26.4	3400	168	0.43	50
	SP1203824HH-03	○	24	26.4	3400	168	0.43	50
	BP1203848HH-03	●	48	24	3400	168	0.43	50
	SP1203848HH-03	○	48	24	3400	168	0.43	50

Bearing Type

- Ball Bearing
- Sleeve Bearing
- ⊙ 1 Ball & 1 Sleeve

⚠ Specifications are subject to change without notice

