


**SPECIFICATION OF THERMOELECTRIC COOLING ASSEMBLY 380-24-AS**


<i>Thermoelectric parameters</i>	<i>Unit</i>	<i>Value</i>
<b>Operating voltage (U)</b>	<b>Volts</b>	<b>24</b>
<b>Operating current (I)</b>	<b>Amps</b>	<b>11</b>
<b>Operating cooling power (Qc)</b>	<b>Watts</b>	<b>210</b>
<b>Temperature difference, (<math>\Delta T</math>)</b>	<b>K</b>	<b>45</b>
<b>Tolerance</b>	<b>%</b>	<b><math>\pm 10</math></b>

<i>Operation parameters</i>	<i>Unit</i>	<i>Value</i>
<b>Working temperature range</b>	<b><math>^{\circ}\text{C}</math></b>	<b><math>-10 \div +70</math></b>
<b>Net weight</b>	<b>kg</b>	<b>5.5</b>

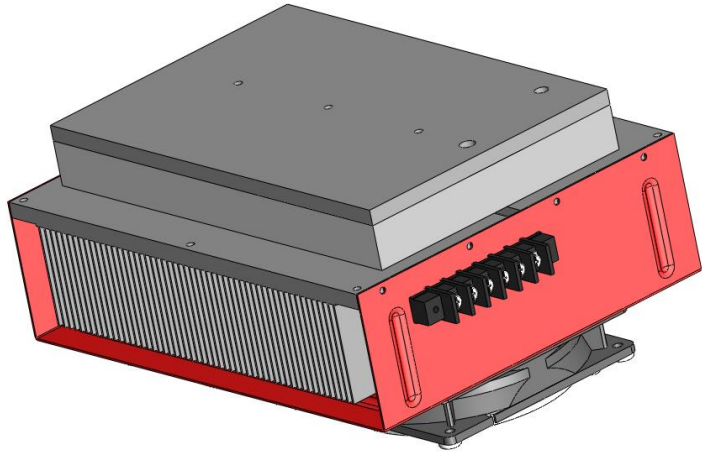