

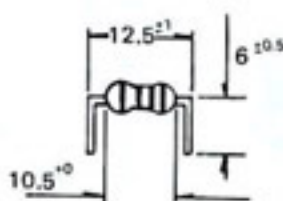
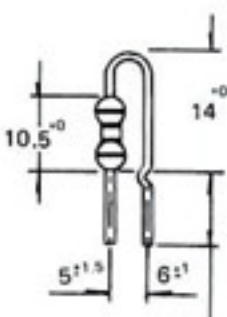


AL0410-TYPE



Outer Dimensions

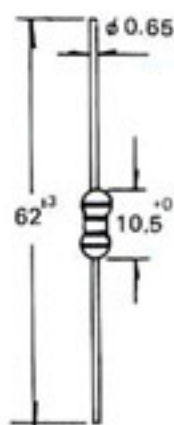


Electrical Parameters:

Item	Inductance L (UH)	Test Freq (MHz)	Standard SPC			
			Q Min	Resonant Frequency Min. (MHz)	D.C. Resistance Max. (ohms)	Current Rating Max. (mA)
AL0410						
-R22M	0.22	25.2	50	300	0.12	1400
-R27M	0.27	"	50	260	0.13	1320
-R33M	0.33	"	55	250	0.14	1280
-R39M	0.39	"	55	230	0.15	1200
-R47M	0.47	"	50	220	0.17	1150
-R56M	0.56	"	50	200	0.18	1100
-R68M	0.68	"	55	190	0.20	1000
-R82M	0.82	"	55	172	0.21	980
-1R0K	1.00	"	45	157	0.21	920
-1R2K	1.20	7.96	50	144	0.22	880
-1R5K	1.50	"	50	131	0.23	800
-1R8K	1.80	"	55	121	0.28	790
-2R2K	2.20	"	55	110	0.28	750
-2R7K	2.70	"	60	100	0.30	720
-3R3K	3.30	"	65	94	0.34	670
-3R9K	3.90	"	65	65	0.37	640
-4R7K	4.70	"	70	56	0.39	620
-5R6K	5.60	"	70	50	0.43	590
-6R8K	6.80	"	75	40	0.49	550
-8R2K	8.20	"	80	35	0.55	530
-100K	10.0	"	65	30	0.63	500
-120K	12.0	2.52	55	25	0.65	480
-150K	15.0	"	55	20	0.81	460
-180K	18.0	"	50	14	0.82	430
-220K	22.0	"	50	9	0.95	410
-270K	27.0	"	45	7	1.05	390
-330K	33.0	"	45	6	1.05	370
-390K	39.0	"	45	6	1.10	350
-470K	47.0	"	40	6	1.31	340
-560K	56.0	"	40	5.5	1.38	320
-680K	68.0	"	40	5	1.62	305
-820K	82.0	"	35	5	1.71	290
-101K	100	"	30	4.5	2.10	275
-121K	120	0.796	55	3.5	3.10	185
-151K	150	"	55	3.0	3.45	175
-181K	180	"	55	2.8	4.10	165
-221K	220	"	60	2.5	4.54	155
-271K	270	"	65	2.3	5.15	145
-331K	330	"	60	2.0	6.40	137
-391K	390	"	65	2.0	7.15	133
-471K	470	"	60	1.9	7.70	126
-561K	560	"	50	1.8	8.50	120
-681K	680	"	55	1.5	9.00	113
-821K	820	"	45	1.2	10.5	105
-102K	1000	"	40	1.0	14.0	100

TEST INSTRUMENTS:

1. HP 4342A Q METER
2. YEW 2755 WHEATSTONE BRIDGE
3. DELICA GRID-DIP METER

Color Code

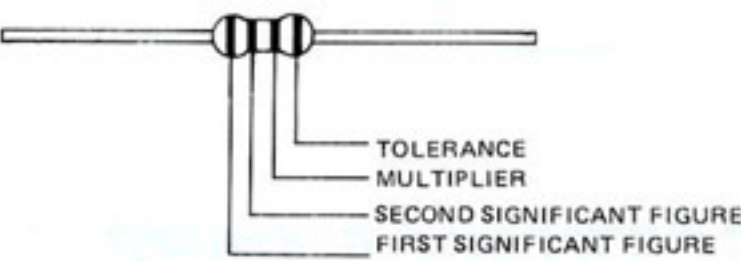

The Nominal Inductance Is Marked By A Color Code As Listed In Table Below

Color	Nominal Inductance (uh) (uh)			Tolerance
	First Figure	Second Figure	Magnification	
Black		0	1	+20%
Brown		1	10	-
Red		2	100	-
Orange		3	1000	-
Yellow		4	-	-
Green		5	-	-
Blue		6	-	-
Purple		7	-	-
Grey		8	-	-
White		9	-	-

Roßmann Electronic GmbH
Neuwiese 29 in D-86911 Dießen
Tel: 08807 / 50 60 Fax: 08807 / 60 27

info@rossmannweb.de

Idf.Nr.: Chilisartikelnr.:	Lagerbestand:
1 MCO410ST-560J	1032
2 MCO410ST-470J	1755
3 MCO410ST-390J	2440
4 MCO410ST-8R2J	967
5 MCO410ST-150K	993
6 MCO410ST-470K	2000
7 MCO410ST-6R8K	1835
8 MCO410ST-1R5J	695
9 MCO410ST-220J	955
10 MCO410ST-1R0J	1117
11 MCO410ST-120J	1000

auf Rolle gegurtet